



[www.forjas-salvador.com](http://www.forjas-salvador.com)

DEXTER 2.0 L + R



AUSTROFLAMM




FORJAS  
SALVADOR

[www.forjas-salvador.com](http://www.forjas-salvador.com)



[www.austroflamm.com](http://www.austroflamm.com)

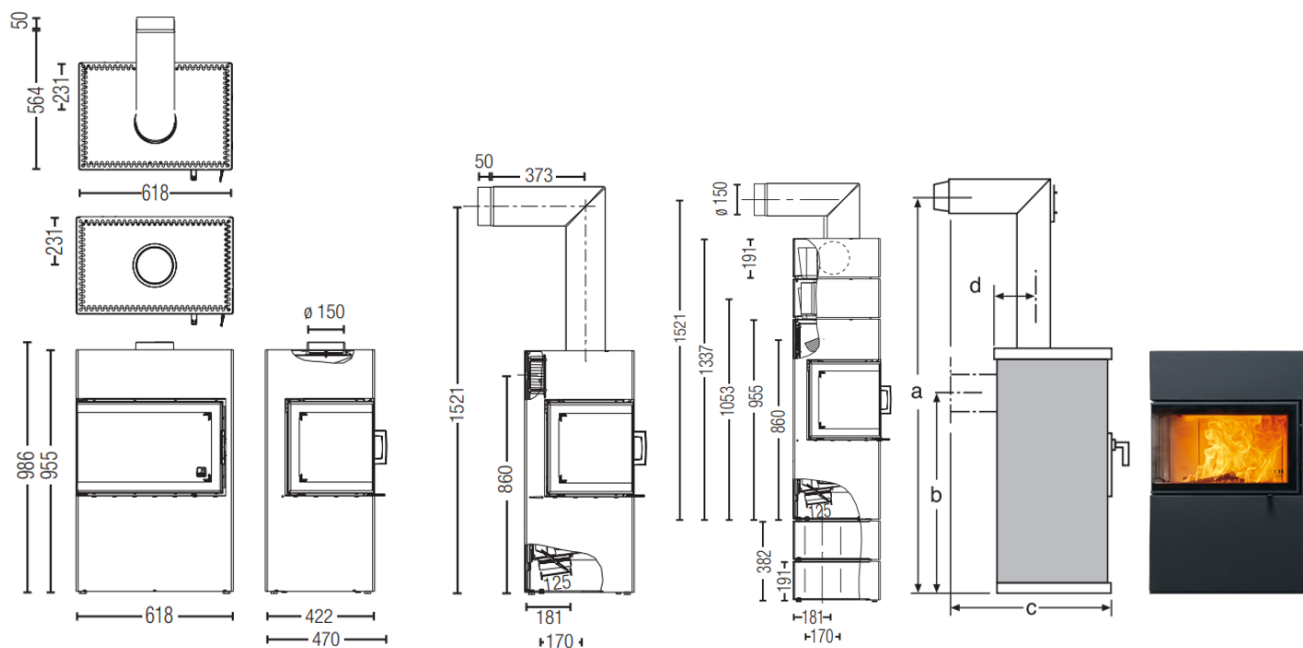

## DIMENSIONS AND WEIGHTS

Steel casing (STM) h x w x d [mm]	955 x 618 x 422
Ceramic casing (KMG) h x w x d [mm]	-
Soapstone casing (SPM) h x w x d [mm]	-
Firebox h x w x d [mm]	390 x 480 x 240
Weight STM [kg]	145
Weight HMS [kg]	45
Flue pipe outlet [mm]	150
Flue pipe connection, middle [mm]	860
Dimensions a, b, c, d [mm]	1521 / 860 / 604 / 231
Safety distances to combustible materials front / side panel; washer / rear [mm]	120 / 300 / 800 / 100

## HEAT OUTPUT

Nominal heat output under EN 13240 [kW]	6
Min. / max. heat output [kW]	3.5 - 8
Space heating capacity (depending on the building insulation)[m³]	65 - 165
Energy efficiency category	A

## FITTINGS

XTRA heat storage technology	-
Heat Memory System	Z
Ash box	o
external air connection / balanced flue operation	below

## DATA FOR THE CHIMNEY SWEEP

Total flue gas flow, closed [g/s]	6
Flue gas temperature, closed [°C]	326
Minimum feed pressure at nominal heat efficiency, closed [Pa]	12
at 0.8 times nominal heat efficiency [Pa]	10